

AD \_\_\_\_\_

USAARU REPORT NO. 67-3

LOADING OF LITTER PATIENTS IN ARMY AIRCRAFT

By

J. C. Rothwell, CPT, MSC  
R. A. Avner, CPT, MSC

OCTOBER 1966

U. S. ARMY AEROMEDICAL RESEARCH UNIT  
Fort Rucker, Alabama



**DOCUMENT CONTROL DATA - R&D***(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)*

1. ORIGINATING ACTIVITY (Corporate author) US Army Aeromedical Research Unit Fort Rucker, Alabama		2 a. REPORT SECURITY CLASSIFICATION <b>Unclassified</b>	
		2 b. GROUP	
3. REPORT TITLE  LOADING OF LITTER PATIENTS IN ARMY AIRCRAFT			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates)			
5. AUTHOR(S) (Last name, first name, initial) Rothwell, J. C., CPT., MSC Avner, R. A., CPT., MSC			
6. REPORT DATE October 1966		7 a. TOTAL NO. OF PAGES 8	7 b. NO. OF REFS 0
8 a. CONTRACT OR GRANT NO.		9 a. ORIGINATOR'S REPORT NUMBER(S) USAARU Report No. 67-3	
b. PROJECT NO. 3AO 2560 1A 819			
c. Task No. 035 (FY 67)		9 b. OTHER REPORT NO(S) (Any other numbers that may be assigned, this report)	
d.			
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited. Qualified requesters may obtain copies from the Defense Documentation Center (DDC), Cameron Station, Alexandria, Virginia			
11. SUPPLEMENTARY NOTES		12. SPONSORING MILITARY ACTIVITY US Army Medical Research and Development Command, Washington, D. C. 20315	
13. ABSTRACT  Two types of aircraft, the CV-2 "Caribou" and the CH-47 "Chinook", are presently available for medical evacuation of relatively large loads (14 and 24 litters respectively) from minimally prepared landing sites. This report indicates maximum rigging times for conversion of these aircraft to ambulance use, optimal crew sizes for minimum loading times, and some suggestions for loading methods and design of future large medical evacuation aircraft.			

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Aviation Medicine Evacuation						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.

## NOTICE

Qualified requesters may obtain copies from the Defense Documentation Center (DDC), Cameron Station, Alexandria, Virginia. Orders will be expedited if placed through the librarian or other person designated to request documents from DDC (formerly ASTIA).

### Change of Address

Organizations receiving reports from the US Army Aeromedical Research Unit on automatic mailing lists should confirm correct address when corresponding about unit reports.

### Disposition

Destroy this report when it is no longer needed. Do not return it to the originator.

### Distribution Statement

Distribution of this document is unlimited.

### Disclaimer

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

AD \_\_\_\_\_

USAARU REPORT NO. 67-3

LOADING OF LITTER PATIENTS IN ARMY AIRCRAFT

By

J. C. Rothwell, CPT, MSC  
R. A. Avner, CPT, MSC

OCTOBER 1966

U. S. ARMY AEROMEDICAL RESEARCH UNIT  
Fort Rucker, Alabama

U. S. Army Medical Research and Development Command


Distribution Statement. Distribution of this document is unlimited.

---

## ABSTRACT

Two types of aircraft, the CV-2 "Caribou" and the CH-47 "Chinook", are presently available for medical evacuation of relatively large loads (14 and 24 litters respectively) from minimally prepared landing sites. This report indicates maximum rigging times for conversion of these aircraft to ambulance use, optimal crew sizes for minimum loading times, and some suggestions for loading methods and design of future large medical evacuation aircraft.

APPROVED:

  
ROBERT W. BAILEY  
LTC, MSC  
Commanding

## LOADING OF LITTER PATIENTS IN ARMY AIRCRAFT

### INTRODUCTION

Two types of aircraft are presently available for evacuation of relatively large loads of non-ambulatory wounded from minimally prepared landing sites. These aircraft are the fixed wing CV-2 (Caribou), which can carry 14 litters, and the rotary wing CH-47 (Chinook), which can carry 24 litters.

The purpose of this report is to indicate the expected rigging time necessary to convert these aircraft to air ambulance use and the subsequent loading times under idealized conditions. This information is intended to produce guidelines for management of patient loading of these aircraft and suggest design changes for future aircraft. Variables such as size and experience of loading crews and order of litter placement were evaluated.

### RIGGING TIME

Litters are supported in both aircraft by means of a post and strap arrangement similar to that shown in Figure 1. Support on the aisle side of the litters is provided by straps with brackets which can be locked onto the litter poles. These straps are stored in compartments in the cabin ceiling when not in use. Support on the wall side of the litters is provided by lightweight metal posts which are also equipped with brackets for the litter poles. The posts can be left in place for most cargo carrying missions but must be removed and stowed before the troop seats can be used.

Initial installation of the straps (including attachment of the straps to the ceiling support and adjustment of the position of the litter pole brackets on the straps) requires not more than 2.5 minutes per strap. Once this initial installation has been performed in a given aircraft it takes not more than 0.6 minutes to unstow and rig each strap for use. It takes not more than 0.3 minutes to unstow and rig each post for use. Thus, after initial installation, the CH-47 can be rigged for litters by one man in about 11 minutes and the CV-2 can be rigged in about 8 minutes. These estimates assume that troop seats are stowed, that the aircraft is stationary, and that it is cleared of all cargo. The man doing the rigging is assumed to possess no more than average intelligence or manual dexterity and to have no prior training other than a demonstration of the method of rigging one strap and one post.

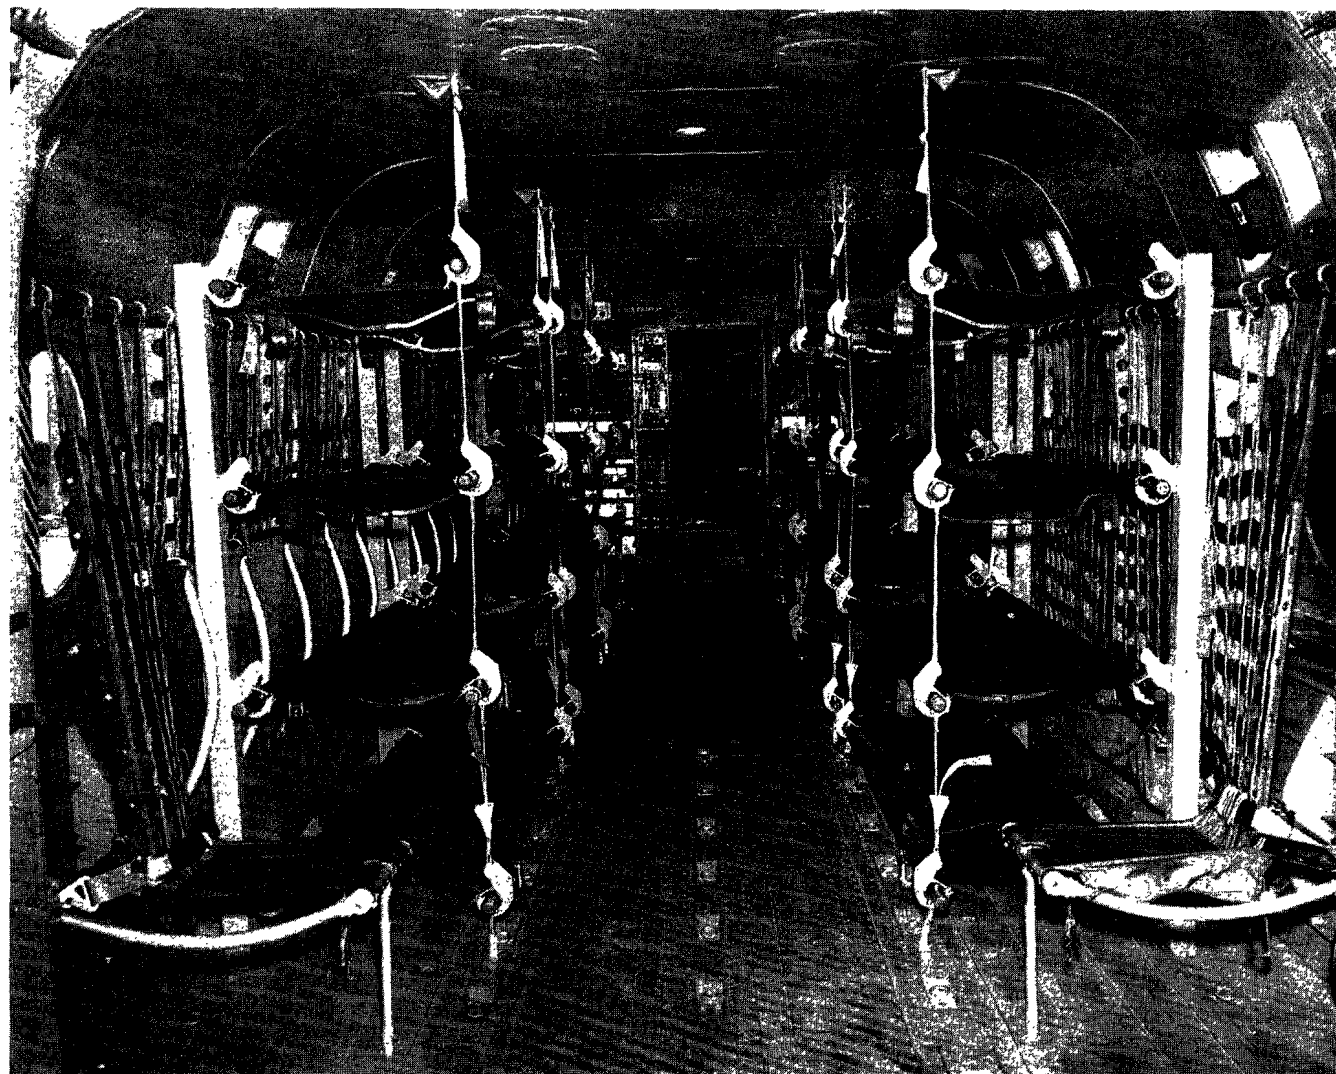


Figure 1  
CH-47 "Chinook" with Litters in Place



## LITTER PLACEMENT

Standard litter loading procedure calls for brackets on the straps to be placed so that the open side of the bracket faces the litter (See Figure 1). Some experienced medical personnel have advocated reversing the bracket so that the open side (which holds the litter pole) is facing away from the litter. This arrangement is said to make rapid placement of the litters easier. Experimental use of both arrangements indicated that (a) litter support is equally secure in either case, (b) there are moderate-to-strong preference among individuals for both methods, and (c) there is no significant difference in loading speed between the two methods. It was concluded that individual crews may be permitted to use whichever technique they prefer.

Litters are generally installed beginning with the topmost litter with other litters being successively placed in the next lower position. This method reduces the chance that a patient might be injured by an unsecured litter being dropped on him from above. The method also has the advantage that the litter bearers can get directly under the topmost litter while placing it in position. Otherwise, the top litter is at a level which makes manipulation extremely difficult and which might lead to injury of litter bearers from improper load handling techniques. Unfortunately the "top to bottom" method also puts the litter bearers at a disadvantage in installing the fourth litter. This bottom litter must be pushed in under the third litter at near-floor level. A suggested alternative to the "top-to-bottom" method is placement of the bottom litter prior to installation of the third litter. This modified method allows room for the litter bearers to bend down directly over the bottom litter as they install it rather than having to lift it into place at arms length. It was thought that the third litter was at such a level that it could be well controlled by the bearers during installation, minimizing chance of injury of the occupant of the fourth litter. Experimental evaluation of this modification however indicated no significant improvement in time or reported ease in litter placement. It is therefore recommended that the standard procedure be retained.

The outside (strap) support has a tension adjustment near the floor. It is necessary to release tension in the strap in order to disconnect the strap for stowage. It is recommended that these straps be left loose during the rigging and be tightened only after the last litter of each section of four is installed. Straps which are loose during litter installation provide adequate support for litters as long as the aircraft is stationary. At the same time, loose straps greatly simplify the job of installing lower litters since the straps may be easily pushed aside as the litter is placed in position. The straps should be tightened as soon as the fourth and lowest litter is secured.

"Experienced" crews of 1, 2 and 3 teams showed little fatigue effect (defined as systematic increases in round-trip time for a given team) in the time necessary to load the CV-2. Round trip time was relatively stable throughout the study for all experienced crews. Mean time between placements was reduced to a minimum of about .5 min. for the 3 team crew. Further reduction is probably not possible since crowding in the aisle prevents simultaneous placements of litters.

Fatigue effects were more noticeable in the "inexperienced" personnel. Round trip time for one 2-man crew increased from about 1 min. to 3.5 min. on the 12th load at which time one of the litter bearers collapsed. With 2 or more crews fatigue effects were negligible. Typical results are shown in Table 1. With increased

# Teams	Total Time (min)			Lag Time <sup>5</sup> (min)			Round Trip Time <sup>6</sup> (min)		
	<sup>1</sup> CV-2	<sup>2</sup> CV-2*	<sup>3</sup> CH-47	CV-2	CV-2*	CH-47	CV-2	CV-2*	CH-47
1	31.0	12.9	-	2.3	1.0	-	2.3	1.0	-
2	13.1	7.2	8.5	0.8	0.7	0.3	1.9	1.3	0.7
3	9.2	7.8	6.8	0.6	0.5	0.3	1.7	1.7	0.8
4	10.3	-	6.2	0.5	-	0.2	3.0	-	0.9
5	8.2	-	6.8	0.5	-	0.2	3.0	-	1.3

Table 1  
Summary of Typical Data

- Notes:
1. For 14 litters loaded by inexperienced personnel in the CV-2 with no inside helpers after 50 ft carry.
  2. For 14 litters loaded by experienced personnel in the CV-2 with no inside helpers after 50 ft carry.
  3. For 24 litters loaded by inexperienced personnel in the CH-47 with 2 inside helpers after 75 ft carry.
  4. All aircraft were rigged for litters at start.
  5. Average time between successive litter placements, including time for securing.
  6. Average time per team from pickup of litter at loading line until return to loading line for the next load.

\*CV-2 experienced personnel - no inside helpers

numbers of teams the lag time between completed placements decreases asymptotically to some fixed value determined by the minimum time necessary to fit a litter in place and secure it. The mean round trip time is identical with the mean lag time for a 1 team crew. With increased numbers of teams the mean round trip time may make slight decreases since the fatigue effect (which tends to lengthen the time of the last few trips and hence the average time) is eliminated. Ultimately, however, the round trip time must increase as a result of querying when teams must wait for another team to secure a litter and remove themselves from the aircraft. As mentioned above, there is no point in having more teams than are necessary to insure that another litter will arrive as soon as each litter is secured. Minimum total loading time will occur when each litter team has to wait for a very short period of time prior to emplacing their litter. Nothing is gained by having more litter teams than this minimum as these added teams simply wait longer to get into the aircraft.

It was clear from the CV-2 portion of the study that the major hindrance to minimizing total loading time was the time necessary for the placement and securing of each litter. Therefore an "inside" 2-man team was added for the CH-47 portion of the study. The job of these men was to secure each litter after it was emplaced by an "outside" or carrying team. Since these 2 men did not have to enter or leave the aircraft while they worked, they caused only minor added crowding in the aisle. The addition of these men decreased the asymptotic lag time to about .24 min., a value less than half of that for unaided securing of litters. This reduction in lag time in turn allowed more litter teams to be effectively added and contributed to 24 litters being loaded on the CH-47 in less time than 14 on the CV-2 (see Table 1). The presence of a second exit which allowed a straight-through traffic pattern in the CH-47 also contributed to the decrease in total loading time however.

The use of the securing team is thus not the sole cause of this added efficiency. The crew sizes and times indicated in Table 1 should be considered only as guidelines for local determination of optimal crew sizes and maximum loading times which might be expected for these aircraft under ideal conditions. Notice in Table 1 that addition of the inside team and a "straight-through" traffic flow in the CH-47 results in a continuously increasing round trip time as more teams are added as opposed to the nonlinear change for inexperienced bearers in the CV-2.

The following general rules are suggested for minimizing crew sizes and loading times:

1. Reduce carrying distance to the minimum safe distance.
2. If possible, use one aircraft door for entrance and another for exit of bearers.